


OPERATING MODES

- There are 3 Modes of operation - NORM (Air or Nitrox), GAUG (no Ni-O2), and FREE (no Ni-O2 or Pressure)
- Dive Mode - if Wet Activation is set Off, you must Activate the DG03 prior to the first dive of a series
- SmartGlo Backlight - press S.
- NORM/GAUG display Times as hr:min, FREE displays Times as min:sec (NDC as hr:min), and Time of Day is always hr:min.

- To Select the Operating Mode to be used, press/release M while the Mode graphic (NORM, GAUG, or FREE) is flashing.

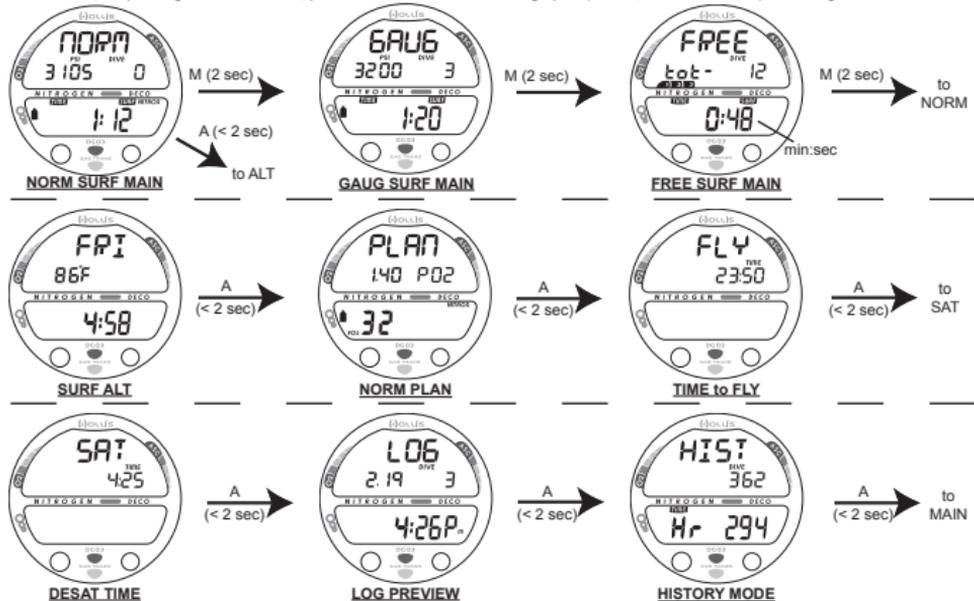

NORM/GAUG SURF >> DG03 & TMT Battery/Pressure Status (to access and scroll through, press S 2 sec)

NORM/GAUG SURF >> SET F >> SET A >> SET U >> SET T

• to access & step through, press both A & S (2 sec).

SET F (FO2/PO2 Alarms) >> GAS >> GAS 2 >> GAS 3 >> FO2 DEFAULT

• to step through, press A (< 2 sec).

SET A >> AUD >> DEPTH >> EDT >> NIBG* >> DTR >> TURN >> END

• to step through, press A (< 2 sec).

SET U >> WET >> UNITS >> DS* (RUN TIMER) >> SS* >> CF* >> GLOW >> SAMPLING >> TMT1, 2, 3**

• to step through, press A (< 2 sec).

SET T >> 12/24 >> HOUR >> MINUTE >> YEAR >> MONTH >> DAY

• to step through, press A (< 2 sec).

* NORM only.

** GAUG only.

FREE SURF >> ALT1 (Temp/Time) >> ALT2 (Last EDT, Max Depth)

• to access & step through, press A (< 2 sec).

FREE SURF >> CDT Status >> SET MINUTES >> SET SECONDS

• to access, press A (2 sec); to set press both A & S (2 sec).

FREE SURF >> EDT Alarm >> DEPTH Alarm 1 >> DEPTH Alarm 2 >> DEPTH Alarm 3



• to access, press both A & S (2 sec); to step through, press A (< 2 sec).



**Read and Understand
the Operating Manual**

NORM/GAUG DIVE MODES

- **ALT** (Alternate) screens - display EDT, ATR, Gas#, TMT#, FO2, PO2 (revert to Main after 5 sec).
- **CF** (Conservative Factor) - when set On, NDLS are reduced to those available at the next higher 3,000 foot (930 meter) Altitude.
- **NO DECO DEEP STOP** - when set On, triggers when deeper than 80 FT (24 M). Preview available by A 2 sec, a Deep Stop is displayed upon ascent to 1/2 Max Depth with 2 min Timer. There is no penalty for ignoring the Stop.
- **NO DECO SAFETY STOP** - deeper than 30 FT (9 M), a Safety Stop is displayed upon ascent to the Stop Depth set, or to 20 FT (6 M) if the Timer is set On. There is no penalty for ignoring the Stop.
- **SmartGlo Backlight** - press S any time while in any dive mode.
- **NORM/GAUG Alarms** - press S (2 sec) to acknowledge/silence. Messages scroll until the situations are corrected.
- **NORM Gas Switching** - press M (< 2 sec) to access and step through Preview screens, then M (2 sec) to Switch to the Gas displayed.

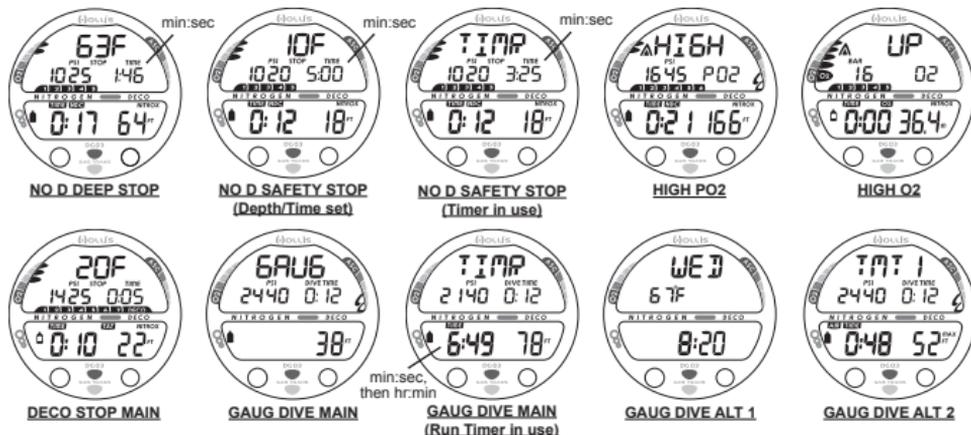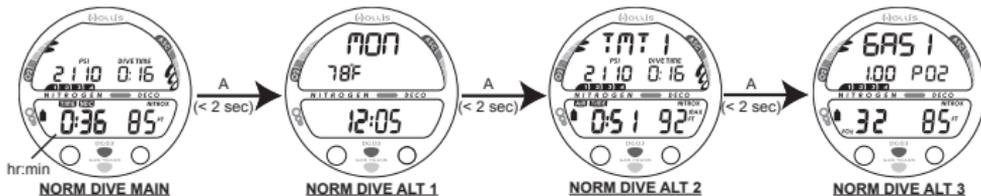

FREE DIVE MODE

- **ALT** screen - to access, press A (< 2 sec); reverts to MAIN after 5 sec.
- **CDT** screen - to access, press A (2 sec); to Stop/Start, press S (< 2 sec); reverts to MAIN after 10 sec.
- **Sampling Rate** (for download data) - fixed at 1 sec.
- **Nitrogen calculations** - based on fixed FO2 of AIR, carries over to NORM if Mode is changed between dives.



Batteries:

- DG03 >> 3 volt, CR2450, Lithium.
- TMTs >> 3 volt, CR2, Lithium.